

***Directed***<sup>®</sup>  
***AUDIO***

OWNER'S  
MANUAL



model | ***s680***

## CONGRATULATIONS

Congratulations for choosing a Directed Studio neodymium component speaker system from Directed Electronics.

Directed Electronics has been the industry leader in high-quality automotive security and audio equipment since 1990, and with the introduction of the Directed Studio line of high-quality loudspeakers for the automobile, Directed continues to set new standards of performance, reliability, and affordability in the mobile electronics industry.

Featuring silk dome tweeters, proprietary injection-molded baskets and high-grade neodymium motors, the Directed Studio line of automotive speakers will excite and delight the auto sound enthusiast with years of high quality audio reproduction.

Directed Studio speakers are covered by a two-year limited warranty. Be sure to retain your original sales receipt, and refer to the warranty section of this guide for full details about your coverage.

## TABLE OF CONTENTS

Limited Two-Year Consumer Warranty .....	3
Features .....	4
Warning .....	4
Sound Quality .....	4
Wire Connector Plugs .....	4
Woofer Installation .....	5
Installation Precautions .....	5
Tweeter Installation .....	7
Specifications .....	11

## **LIMITED TWO-YEAR CONSUMER WARRANTY**

Directed Electronics, Inc. (DEI) promises to the original purchaser, to replace this product should it prove to be defective in workmanship or material under normal use, for a period of two years from the date of purchase from the dealer as indicated by the date code marking of the product PROVIDED the product was installed by an authorized Directed dealer. During this two-year period, there will be no charge for this replacement PROVIDED the unit is returned to DEI, shipping pre-paid. If the unit is installed by anyone other than an authorized Directed dealer, the warranty period will be one year from the date of purchase by the dealer as indicated by the date code marking of the product. This warranty is non-transferable and does not apply to any unit that has been modified or used in a manner contrary to its intended purpose, and does not cover damage to the unit caused by installation or removal of the unit. During this one-year period, there will be no charge for this replacement PROVIDED the unit is returned to DEI, shipping pre-paid. This warranty is void if the product has been damaged by accident or unreasonable use, neglect, improper service or other causes not arising out of defects in materials or construction. Units which are found to be damaged by abuse resulting in thermally damaged voice coils are not covered by this warranty but may be replaced at the absolute/sole discretion of DEI. ALL WARRANTIES INCLUDING BUT NOT LIMITED TO EXPRESS WARRANTY, IMPLIED WARRANTY, WARRANTY OF

MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, AND WARRANTY OF NON-INFRINGEMENT OF INTELLECTUAL PROPERTY ARE EXPRESSLY EXCLUDED TO THE MAXIMUM EXTENT ALLOWED BY LAW, AND DEI NEITHER ASSUMES NOR AUTHORIZES ANY PERSON TO ASSUME FOR IT ANY LIABILITY IN CONNECTION WITH THE SALE OF THE PRODUCT. DEI HAS ABSOLUTELY NO LIABILITY FOR ANY AND ALL ACTS OF THIRD PARTIES INCLUDING ITS AUTHORIZED DEALERS OR INSTALLERS. Unit must be returned to DEI, postage pre-paid, with bill of sale or other dated proof of purchase bearing the following information: consumer's name, telephone number, and address, authorized dealer's name and address, and product description. Note: This warranty does not cover labor costs for the removal and reinstallation of the unit. IN ORDER FOR THIS WARRANTY TO BE VALID, YOUR UNIT MUST BE SHIPPED WITH PROOF OF INSTALLATION BY AN AUTHORIZED DEI DEALER. ALL UNITS RECEIVED BY DEI FOR WARRANTY REPAIR WITHOUT PROOF OF DEI DEALER INSTALLATION WILL BE COVERED BY THE LIMITED 1 YEAR PARTS AND LABOR WARRANTY. Note: This warranty does not cover labor costs for the removal and reinstallation of the unit. BY PURCHASING THIS PRODUCT, THE CONSUMER AGREES AND CONSENTS THAT ALL DISPUTES BETWEEN THE CONSUMER AND Directed SHALL BE RESOLVED IN ACCORDANCE WITH CALIFORNIA LAWS IN SAN DIEGO COUNTY, CALIFORNIA.

## FEATURES

### Woofers

- Injection-molded graphite cone for stiffness and low mass.
- Fiberglass-reinforced injection-molded basket.
- High-grade neodymium motor structure for higher efficiency.

### Tweeters

- New hotter 25mm ferrofluid cooled silk dome tweeter with neodymium magnet.
- Swiveling flush and surface mount tweeter housings provided.

### Crossover

- Supplied inline 12 dB/octave passive crossover.

## WARNING



High-powered car audio systems may produce sound pressure levels that exceed the threshold at which hearing loss may result.

They may also impair a driver's ability to hear traffic sounds or emergency vehicles. Use common sense and practice safe listening habits when listening to or adjusting your audio system.

## SOUND QUALITY

Obtaining the highest quality sound reproduction in the mobile environment requires installation techniques and knowledge of vehicle interiors that go far beyond simple replacement of stock speakers. Speaker location, orientation, phasing, and the vehicle's interior materials are important considerations when

designing and installing an auto sound system.

To achieve the best sound quality possible from your Directed Audio loudspeakers, Directed recommends the installation be performed by an MECP certified technician.

## INSTALLATION PRECAUTIONS

The Directed s680 neodymium separates are designed for installation into factory speaker locations, custom mounting enclosures or any flat mounting surface inside the vehicle with sufficient rear clearance. The following precautions and instructions cover the basic and most common types of installation.

- Check behind panels for clearance of metal brackets, hoses, and wire harnesses before making any cuts.
- When mounting speakers into doors, roll the window up and down to check clearance of the glass and window regulator.
- Make sure the mounting holes are the correct size for the speaker. Undersized holes can cause speaker

distortion or shorting of the speaker leads to the chassis ground. Oversized holes will not allow the mounting screws to make sufficient contact with the panel, allowing the speaker to become loose.

- Always protect the wires when routing by avoiding sharp metal edges, moving parts such as heater or vent controls, clutch pedals, brake pedals, steering columns, and power window motors and gears.
- When routing wires through metal panels and doorjams always use vinyl tubing and grommets for protection and a professional-looking installation.


## WOOFER INSTALLATION

The Directed s680 is designed as a direct replacement of Ford and Mazda 6x8 factory speakers, but is also supplied with a 6x9 adapter ring for additional applications. Review the *Installation Precautions* section of this guide before proceeding.

1. Place the adapter ring against the mounting surface in the desired location for the woofer.
2. Draw the speaker hole and mounting screw locations on the panel with a marker.
  - The s680 woofer requires an oval hole
3. Remove the cutout template and carefully cut the speaker hole to the proper size. If there is a pre-existing hole that is undersize, mark it and

- cut it to the proper size. If the hole is oversize, it is recommended that a spacer be built to compensate.
4. Pre-drill the holes for the mounting screws using a 1/8" drill bit.
  5. Route the supplied wires through the speaker location to the stereo cramp.
  6. Install the screw speed clips if not installing into a metal panel.
  7. Connect the speaker wire to the woofer taking care to observe proper speaker polarity. Connect the pigtail harness of the tweeter to the matching harness of the inline crossover.
  8. Place the woofer into the hole and attach using the supplied screws. Take care at this time not to slip with a tool while mounting or the speaker could be damaged.
  9. If using the optional 6x9 adapter ring and grill, place several pieces of the butyl compound on the edge of the speaker grill, then press the grill into the speaker-mounting flange.
- NOTE:** A supply of butyl compound is included and can be used to attach the speaker grill as well as prevent rattles.

**FIGURE 1—WOOFER INSTALLATION**

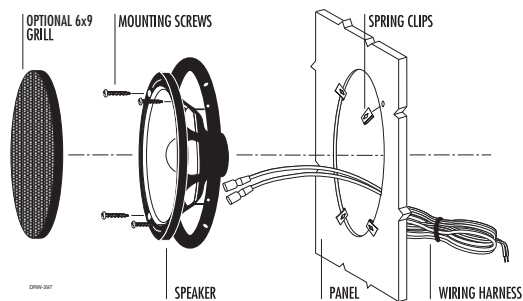

## **TWEETER INSTALLATION**

Review the *Installation Precautions* section of this guide before proceeding.

### **Flush Mounting into Removed Panels**

1. Disassemble the underside of the woofer mounting flange by removing the four screws from the bottom side of the tweeter bridge. Twist the top of the tweeter to remove the grill and gain access to the tweeter. Pull the tweeter out with the wires attached.
2. Determine the tweeter mounting location, then route the wires from the crossover to the tweeter location.
3. Mark the center point of the tweeter.
4. If using a hole saw, first drill a pilot hole, then cut out the hole using a standard 2-1/8" hole saw.
5. If not using a hole saw, use the surface mount trim ring as a template to mark the proper size hole. Cut out the hole.
6. With the tweeter assembled, route the wires through the hole and the pressure ring and slip the pressure ring over the tweeter assembly.
7. Align the tweeter so the Directed logo faces the desired direction then push the pressure ring on to the rear of the tweeter assembly until the tweeter is snugly mounted to the panel.

8. Connect the speaker wires observing the correct polarity and re-assemble the panel.

### **Flush Mounting into Mounted Panels**

1. Remove the tweeter from the flush mount housing and insert the proper length machine bolt through the center hole of the flush mount housing and connect to the spring steel X-bracket. (See Figure 3.)
2. Connect the speaker wires observing the correct polarity.
3. Press the X-bracket portion of the assembly through the hole until its legs spring open.
4. Screw the bolt in until the tweeter housing is firmly mounted to the panel. (Make sure the arrow at the rear of the tweeter housing is pointing in the desired direction.)
5. Insert the tweeter into the housing and attach trim ring. (Refer to the trim ring information at the end of this section.)

### **Tweeter Surface Mounting**

1. With the tweeter removed from the bridge, determine the tweeter mounting location, then route the wires from the crossover to the tweeter location.
2. Place the surface mount housing

- against the panel and mark the two holes at the rear of the housing.
3. Drill the smaller center hole using a 1/8" drill bit. This is the mounting screw hole.
  4. Drill the larger off-center hole using a 3/8" drill bit, insert a grommet and route the speaker wire from the crossover through the grommet.
  5. After removing the surface mount tweeter assembly trim ring, route the tweeter wires through the larger hole in the housing and connect to the speaker wires from the crossover. (See Figure 5.)
  6. Insert the excess speaker wire into the hole and position the housing so the housing will not pinch the wires after final mounting.
  7. Attach the housing using the supplied screws of the correct length for a solid mount.
  8. Insert the tweeter into the housing and attach the trim ring.


### Removing Trim Rings

Hold the tweeter housing while gently turning the trim ring in a clockwise direction until it releases. The trim ring can then be easily lifted away from the tweeter housing.

### Installing Trim Rings


- **Flush Mount Assembly** - With the arrow in the tweeter housing facing up, place the trim ring into the housing with the Directed logo at the bottom and turn in a counter clockwise direction until the trim ring clicks into place.
- **Surface Mount Assembly** - Insert the trim ring into the housing and turn in a counter clockwise direction until the trim ring clicks into place.

FIGURE 2—FLUSH MOUNTING REMOVED PANELS

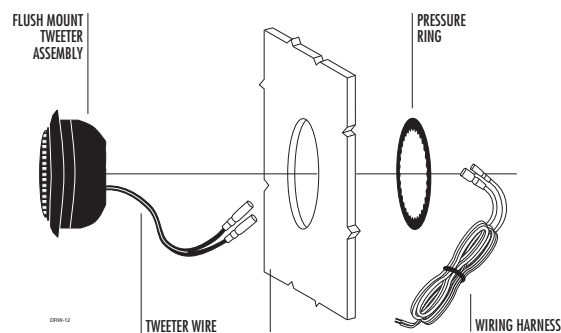




**FIGURE 3—FLUSH MOUNTING MOUNTED PANELS**

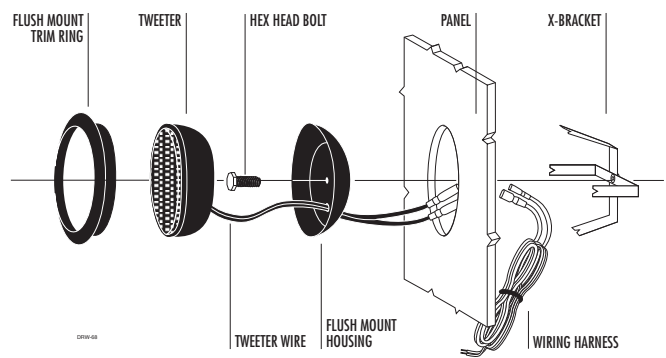

**FIGURE 5—TWEETER REMOVAL FROM BRIDGE**



**FIGURE 5—TWEETER SURFACE MOUNTING**


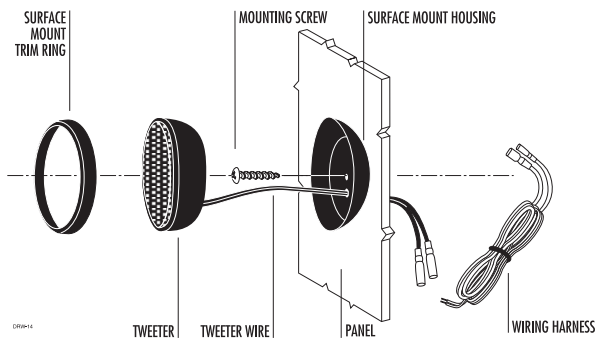


FIGURE 6—CONNECTION/ADJUSTMENT SINGLE AMPLIFIER



## SPECIFICATIONS

Directed model	680
Frequency response	40 Hz - 21 kHz
Power handling RMS	60 watts
Power handling peak	120 watts
Impedance	4 ohms
Magnet weight	52.82 g
Vas	8.8L
Fs	68 Hz
Qts	0.52
Efficiency (1W/1M)	90 dB
Mounting Depth	2-6/8"
Mounting hole diameter	7-11/16" x 5-3/8"
<b>Common Driver Specifications:</b>	
Magnet type	Neodymium
Magnet diameter	1-7/8"
Voice coil former	Kapton Polyimide
Voice coil diameter	25 mm (1")
Voice coil layers	4
<b>Tweeter (19mm silk dome neodymium):</b>	
Fs	1.2 kHz
Efficiency (1W/1M)	90 dB
Crossover	12 dB per octave with tweeter protection

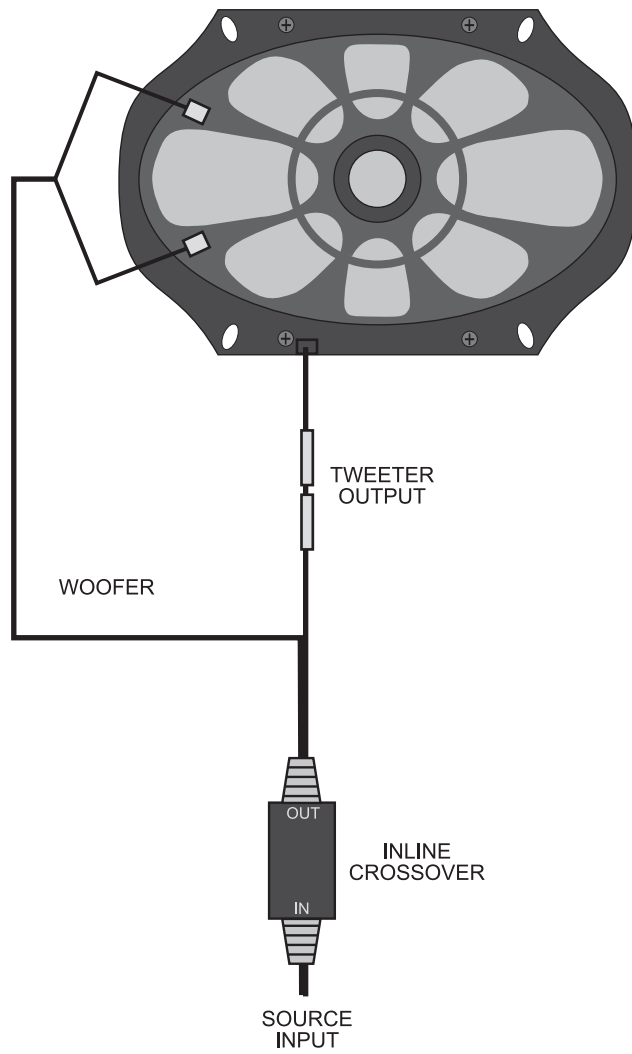

Directed Electronics, Inc.  
Vista, California 92083  
[www.directed.com](http://www.directed.com)

**The company behind this system is Directed Electronics, Inc.**

Since its inception, Directed has had one purpose, to provide customers with the finest vehicle security, car stereo products, rear seat entertainment, and accessories available. The recipient of more than 20 patents in the field of advanced electronic technology, Directed is ISO 9001 registered.

**Directed® is committed to delivering world-class quality products and services that excite and delight our customers.**



Directed is a proud member of



Quality Directed products are sold and serviced throughout North America and around the world  
Call **800 274 0200** for more information about our products and services